


GPPL 32W LED Panel Tri-colour 595x595 IP20

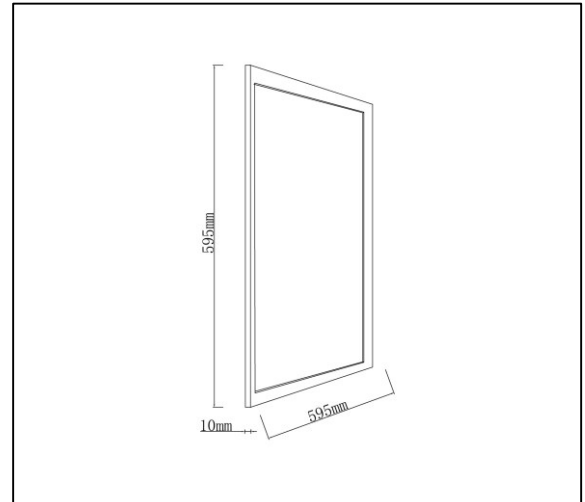

MODEL	CS-GPPL-A1-S22-32-11-01-A-2-C	HOUSING COLOUR	White
INPUT VOLTAGE (V)	AC 220-240V; 50/60Hz	MATERIAL	Aluminium + Polycarbonate
PROTECTION CLASS	Class II	IP	IP20
POWER FACTOR (PF)	0.9	IK	N/A
WATTAGE (W)	32W	OPERATING TEMPERATURE (°C)	-10°C to +40°C
FLICKER FREE (Y/N)	Yes	DIMMABLE (Y/N)	No
LUMEN OUTPUT (LM)	3,600 LM	DIMMING TYPE	N/A
EFFICACY (LM/W)	95~110 LM/W	INSTALLATION TYPE	Suspension
COLOUR TEMPERATURE (K)	Tri-colour (3000K-4000K-6000K)	DIMENSION (mm)	595 x 595 x 10 mm
BEAM ANGLE (°)	120°	NET WEIGHT (kg)	2.2 kg
CRI (Ra)	80	LIFESPAN (hr.)	25,000 hrs.
SDCM	<6	WARRANTY (yr.)	3 yrs.
UGR	22	COMPLIANCE	SAA