


KG 10W PIR Sensor Downlight Tricolour 90mm

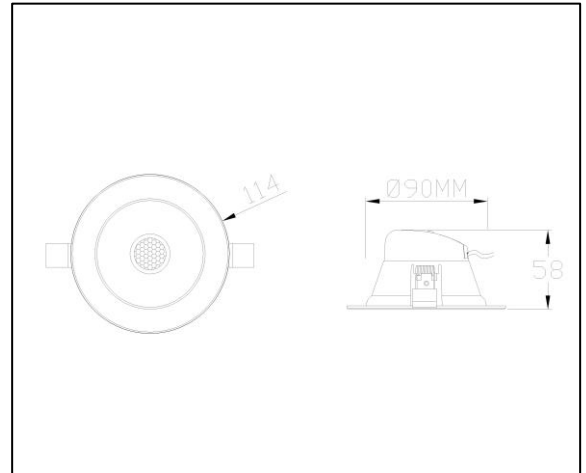

MODEL	KG-2210K-R-CCT	MATERIAL	ALUMINIUM+PC
INPUT VOLTAGE (V)	220-240V; ~50Hz	IP	IP20
PROTECTION CALSS	Class II	IK	IK05
IC-4 RATED (Y/N)	Yes	SENSOR SPECIFICATION	PIR Sensor; Induction Distance: 4-6m; Delay Time: 60S
POWER FACTOR	PF >0.9	OPERATING TEMPERATURE (°C)	-20°C ~ +60°C
WATTAGE (W)	10W	DIMMABLE (Y/N)	Yes
FLICKER FREE (Y/N)	Yes	DIMMING TYPE	TRAIC Dimming
LUMEN OUTPUT (LM)	700 LM	INSTALLATION TYPE	Recessed
EFFICACY (LM/W)	70 LM/W	CUT-OUT (mm)	Ø90
COLOUR TEMPERATURE (K)	Tricolour: 3000K-4000K-6000K	DIMENSION (mm)	Ø114*H58
BEAM ANGLE (°)	100°	NET WEIGHT	0.21Kg
CRI (Ra)	≥80	LIFESPAN	50,000 Hours
SDCM	≤7	WARRANTY	5 years
UGR	13	COMPLIANCE	SAA, RCM