


Hero 150W LED Highbay 5000K

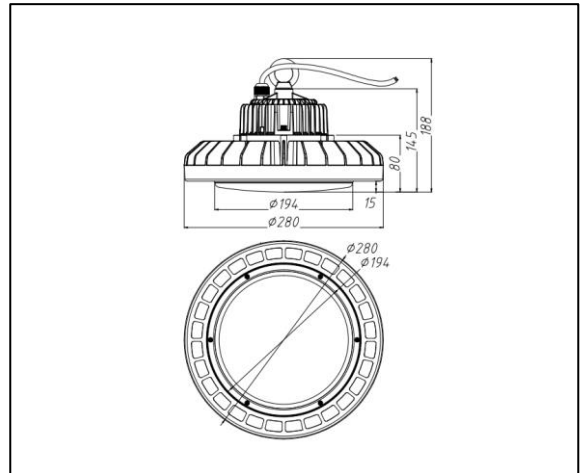

MODEL	CS-FYT-HB07-150W-5000K-110D	UGR	<30
INPUT VOLTAGE (V)	100-277V AC	HOUSING COLOUR	Black
PROTECTION CALSS	CLASS I	MATERIAL	Aluminum housing +PC lens
IC-4 RATED (Y/N)	NA	IP	65
SPD (KV)	4KV / 6KV	IK	10
POWER FACTOR (PF)	>0.95	AMBIENT TEMPERATURE (°C)	Ta 55
WATTAGE (W)	150	OPERATING TEMPERATURE (°C)	-30 to +55
FLICKER FREE (Y/N)	YES	DIMMABLE (Y/N)	NA
LUMEN OUTPUT (LM)	19,500	INSTALLATION TYPE	Suspension, surface mounted
EFFICACY (LM/W)	130	DIMENSION (mm)	Ø280*H188
COLOUR TEMPERATURE (K)	5000K	NET WEIGHT (kg)	3.5
BEAM ANGLE (°)	110°	LIFETIME (hr.) @L70B50	50,000
CRI (Ra)	>80	WARRANTY (yr.)	5
SDCM	<5	COMPLIANCE	SAA