




SHOP SMART. SHOP VALUE
SHOP *differently*



Rafe 24W Surface Mount Downlight IP65 WH

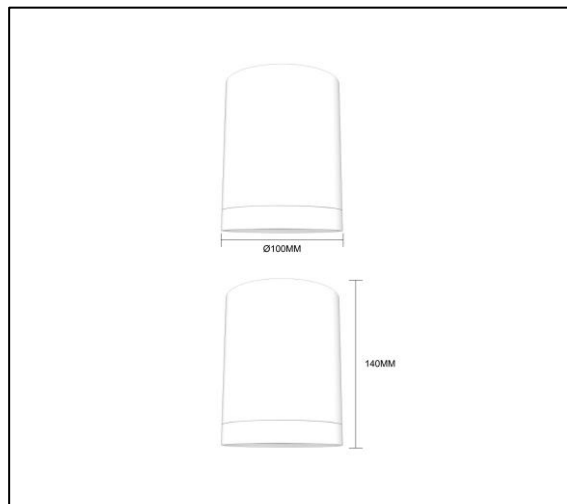

SKU	CS-CGD-LC1517R-01-24W-3000K-60D-IP65-WH	UGR	19
	CS-CGD-LC1517R-01-24W-4000K-60D-IP65-WH		
	CS-CGD-LC1517R-01-24W-5000K-60D-IP65-WH		
LED BRAND & TYPE	Bridgelux COB	HOUSING COLOUR	WHITE
INPUT VOLTAGE (V)	220-240V, 50/60Hz	MATERIAL	ALUMINUM
PROTECTION CALSS	CLASS I	IP	IP65
IC-4 RATED (Y/N)	YES	IK	NA
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +40°C
WATTAGE (W)	24W	DIMMABLE (Y/N)	Yes
FLICKER FREE (Y/N)	YES	DIMMING TYPE	Traic-dimming
LUMEN OUTPUT (LM)	2160LM	INSTALLATION TYPE	SURFACE MOUNTED
EFFICACY (LM/W)	90LM/W	DIMENSION (mm)	Ø100 x H140 mm
COLOUR TEMPERATURE (K)	3000K / 4000K / 5000K	NET WEIGHT (kg)	1.1
BEAM ANGLE (°)	60°	LIFESPAN (HOURS)	50,000
CRI (Ra)	90	WARRANTY (YEARS)	3
SDCM	3	COMPLIANCE	SAA, RCM



MOORABBIN

131-133 Keys Road
Moorabbin VIC 3189

ALTONA

1 Drake Boulevard
Altona VIC 3018

ALBION

35 Sandgate Road
Albion QLD 4010

AUCKLAND

10 Fairfax Avenue, Penrose
Auckland 1061, New Zealand

sales@jh.market

www.jh.market

sales@jhmarket.co.nz

jhmarket.co.nz

AU National: 1300 000 808

Queensland: 1300 000 707

NZ National: 0800 748 848

Yiyun Corporation Pty Ltd | All information in this catalogue is subject to change at business discretion.

Please contact the office for confirmation of pricing and stock availability at time of order