


DGT Aluminum Anti-glare Downlight 25W 150mm



DGTLED
LIGHTING SERIES

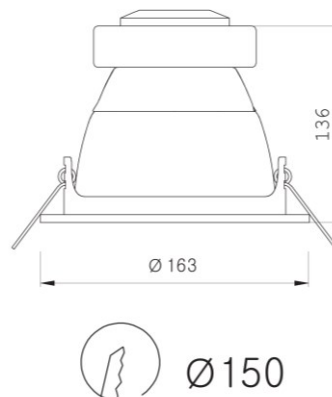

MODEL	CS-DGT-MQ-7355-25W-3000K-60D CS-DGT-MQ-7355-25W-4000K-60D CS-DGT-MQ-7355-25W-5000K-60D	IP	20
INPUT VOLTAGE (V)	220-240V AC	AMBIENT TEMPERATURE (°C)	25°C
POWER FACTOR (PF)	>0.8	OPERATING TEMPERATURE (°C)	-20 to +40°C
WATTAGE (W)	25W	DIMMABLE	Yes
LUMEN OUTPUT (LM)	1950 (+/-10%) LM	INSTALLATION TYPE	Recessed
COLOUR TEMPERATURE	3000K / 4000K / 5000K	CUT-OUT (mm)	Ø150 (+/-5) mm
BEAM ANGLE (°)	60°	DIMENSION (mm)	Ø163 x H136 mm
CRI (Ra)	90	NET WEIGHT (kg)	0.70 kg
SDCM	5	LIFESPAN (hr.)	35,000 hrs.
UGR	22	WARRANTY (yr.)	5 yrs.
HOUSING COLOUR & MATERIAL	White, aluminum	COMPLIANCE	SAA