


KG 18W PIR Sensor Oyster Light 6000K

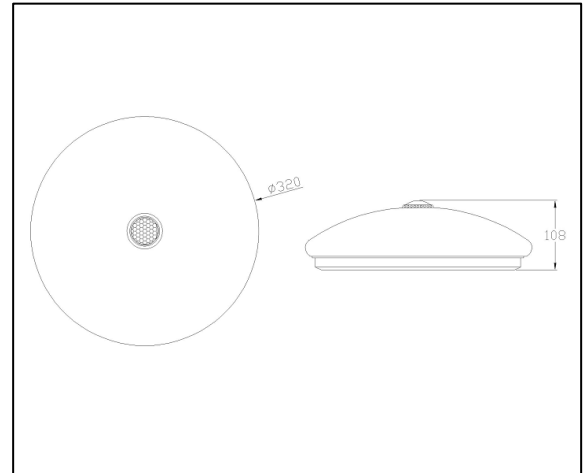

MODEL	CS-KG-1218R-6000K	MATERIAL	Metal + PMMA
INPUT VOLTAGE (V)	220-240V; ~50Hz	IP	IP20
PROTECTION CALSS	Class II	IK	IK05
IC-4 RATED (Y/N)	Yes	SENSOR SPECIFICATION	PIR Sensor; Induction Distance: 4-6m; Delay Time: 60S
POWER FACTOR	PF >0.9	OPERATING TEMPERATURE (°C)	-20°C ~ +60°C
WATTAGE (W)	18W	DIMMABLE (Y/N)	Yes
FLICKER FREE (Y/N)	Yes	DIMMING TYPE	TRAIC Dimming
LUMEN OUTPUT (LM)	1,480 LM	INSTALLATION TYPE	Ceiling Mount
EFFICACY (LM/W)	82 LM/W	CUT-OUT (mm)	NA
COLOUR TEMPERATURE (K)	6000K	DIMENSION (mm)	Ø320 x H108
BEAM ANGLE (°)	120°	NET WEIGHT	0.59Kg
CRI (Ra)	≥80	LIFESPAN	50,000 Hours
SDCM	≤7	WARRANTY	5 years
UGR	13	COMPLIANCE	SAA, RCM